

DS-KD8003-IME1/NS Video Intercom Module Door Station


HIKVISION[®]



Key Feature

- Modular door station Main unit, needs mouting bracket
- 2MP HD Camera, Fish eye, IR Supplement
- 1 Call physical Button, 2 lock relays, 4-ch alarm input
- IP65, 12 VDC or standard POE
- Video intercom to indoor station and master station

Typical Application

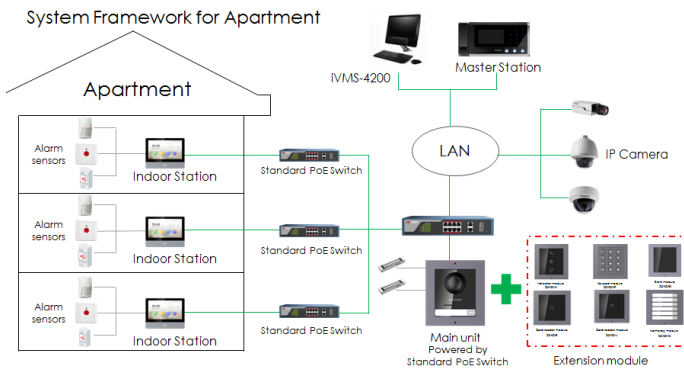

Specification

| System parameters | |
|--------------------|---------------------------------|
| Operation system | Embedded Linux operation system |
| Flash | 16 MB |
| RAM | 256 MB |
| CPU | Embedded MCU Processor |
| Display parameters | |
| Size | / |
| Operation method | / |

| Type | / |
|----------------------------|---|
| Resolution | / |
| Video parameters | |
| Video compression standard | H.264 |
| Supplement light | IR supplement |
| Lens | Low Illumination 2 MP HD IR Camera |
| FOV | Horizontal: 180° , Vertical: 96° |
| WDR | Supported |
| Pixel | Main stream : 1920 × 1080 Sub stream : 720 × 480 |
| Audio parameters | |
| Audio compression standard | G.711 U |
| Audio input | Built-in omnidirectional microphone |
| Audio output | Built-in loudspeaker (More than 85 dB within 20 cm) |
| Audio compression bitrate | 64 Kbps |
| Audio quality | Noise suppression and echo cancellation |
| Volume adjustment | Adjustable |
| Capacity | |
| Fingerprint capacity | / |
| User capacity | / |


| | |
|---------------------------|---|
| Face capacity | / |
| Linked indoor station | 100 |
| Event capacity | / |
| Network parameters | |
| Communication protocol | TCP/IP, RSTP |
| Wired network | Support |
| Wi-Fi | / |
| Bluetooth | / |
| 3G/4G | / |
| Device interfaces | |
| Alarm input | 4 |
| TAMPER | 1 |
| Network interface | 1 10/100 Mbps self-adaptive Ethernet |
| Exit button | 2 |
| RS-485 | 1 |
| USB | / |
| Wiegand | / |
| TF card | / |
| Alarm output | 2 |
| Lock control | 2 |
| Door contact input | 2 |
| Power interface | 1 |
| General | |
| Button | / |
| Installation | Flush mounting, surface mounting |
| Indicator | / |
| Weight | Without package: 415 g With package: 625 g |
| Protective level | IP65 |
| Working temperature | -40° C to +55° C (-40° F to 131° F) |
| Working humidity | 10% to 95% |
| Dimensions | 98 mm × 99.8 mm × 43.9 mm (3.86" × 3.93" × 1.73") |
| Battery | / |
| Power supply | IEEE802.3af, standard PoE 12 VDC, 1 A |
| Application environment | Outdoor |

| | |
|-------------------|--------|
| Power consumption | ≤ 10 W |
|-------------------|--------|

Available Model


DS-KD8003-IME1/NS

Appearance and Interfaces

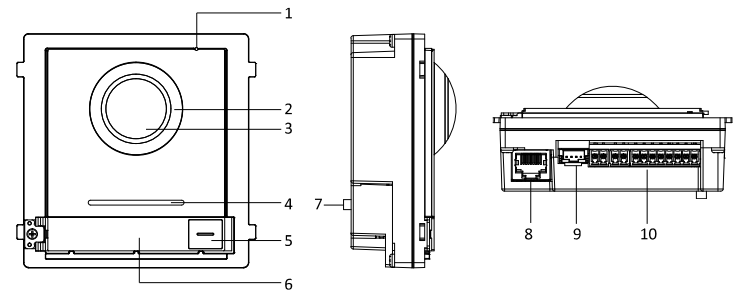

| No. | Description | No. | Description |
|-----|--------------------------------------|-----|--------------------------------------|
| 1 | Microphone | 6 | Nametag |
| 2 | Low Illumination IR Supplement Light | 7 | TAMPER |
| 3 | Built-in Camera | 8 | Network Interface |
| 4 | Loudspeaker | 9 | Module-connecting Interface (output) |
| 5 | Call Button | 10 | Terminals |

Dimension

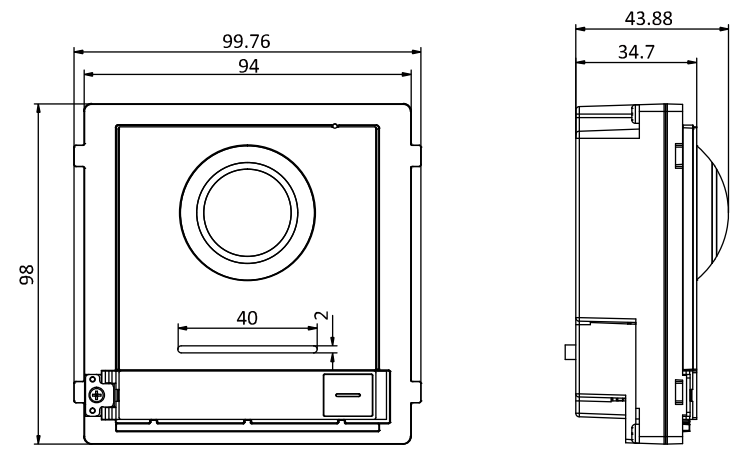



Distributed by

Мегара Секюрити
<https://shop.sotbg.eu>
shop@sotbg.eu
+359889769686

HIKVISION®**Headquarters**

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision USA

T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Australia

T +61-2-8599-4233
salesau@hikvision.com

Hikvision India

T +91-22-28469900
sales@pramahikvision.com

Hikvision Canada

T +1-866-200-6690
sales.canada@hikvision.com

Hikvision Thailand

T +662-275-9949
sales.thailand@hikvision.com

Hikvision Europe

T +31-23-5542770
sales.eu@hikvision.com

Hikvision Italy

T +39-0438-6902
info.it@hikvision.com

Hikvision Brazil

T +55 11 3318-0050
Latam.support@hikvision.com

Hikvision Turkey

T +90 (216)521 7070- 7074
sales.tr@hikvision.com

Hikvision Malaysia

T +601-7652-2413
sales.my@hikvision.com

Hikvision UK & Ireland

T +01628-902140
sales.uk@hikvision.com

Hikvision South Africa

Tel: +27 (10) 0351172
sale.africa@hikvision.com

Hikvision France

T +33(0)1-85-330-450
info.fr@hikvision.com

Hikvision Kazakhstan

T +7-727-9730667
nikia.panfilov@hikvision.ru

Hikvision Vietnam

T +84-974270888
sales.vt@hikvision.com

Hikvision UAE

T +971-4-4432090
salesme@hikvision.com

Hikvision Singapore

T +65-6684-4718
sg@hikvision.com

Hikvision Spain

T +34-91-737-16-55
info.es@hikvision.com

Hikvision Tashkent

T +99-87-1238-9438
uzb@hikvision.ru

Hikvision Hong Kong

T +852-2151-1761
info.hk@hikvision.com

Hikvision Russia

T +7-495-669-67-99
saleru@hikvision.com

Hikvision Korea

T +82-(0)31-731-8817
sales.korea@hikvision.com

Hikvision Poland

T +48-22-460-01-50
info.pl@hikvision.com

Hikvision Indonesia

T +62-21-2933759
Sales.Indonesia@hikvision.com

Hikvision Colombia

sales.colombia@hikvision.com