

HWT-B150-P 5 MP Fixed Mini Bullet Camera



Key Features

- High quality imaging with 5 MP, 2560 × 1944 resolution
- 2.8 mm and 3.6 mm fixed focal lens
- Up to 20 m IR distance for bright night imaging
- One port for four switchable signals (TVI/AHD/CVI/CVBS)
- Water and dust resistant (IP66)






▪ Specification

| Camera | |
|--------------------------|--|
| Image Sensor | 5 MP CMOS |
| Max. Resolution | 2560 (H) × 1944 (V) |
| Min. Illumination | Color: 0.01 Lux @ (F2.0, AGC ON), 0 Lux with IR |
| Shutter Time | PAL: 1/25 s to 1/50, 000 s - NTSC: 1/30 s to 1/50, 000 s |
| Day & Night | ICR |
| Angle Adjustment | Pan: 0 to 360°, Tilt: 0 to 180°, Rotation 0 to 360° |
| Signal System | PAL/NTSC |
| Lens | |
| Lens Type | 2.8 mm and 3.6 mm fixed focal lens |
| Focal Length & FOV | 2.8 mm, horizontal FOV: 85°, vertical FOV: 63°, diagonal FOV:110° 3.6 mm, horizontal FOV: 80°, vertical FOV: 63°, diagonal FOV:105° |
| Lens Mount | M12 |
| Image | |
| Image Parameters Switch | STD/HIGH-SAT |
| Image Settings | Brightness, Sharpness, Mirror, Smart IR, AGC |
| Frame Rate | TVI: 5 M @ 20 fps, 4 M @ 30 fps, 4 M @ 25 fps, 1080p @ 30 fps, 1080p @ 25 fps AHD: 5 M @ 20 fps, 4 M @ 30 fps, 4 M @ 25 fps CVI: 4 M @ 30 fps, 4 M @ 25 fps - CVBS: PAL/NTSC |
| Day/Night Mode | Auto/Color/BW (Black and White) |
| Wide Dynamic Range (WDR) | Digital WDR |
| Image Enhancement | BLC, HLC |
| White Balance | ATW/MANUAL |
| Interface | |
| Video Output | 1 HD analog output |
| General | |
| Material | Plastic |
| Dimension | 165 mm × 62 mm × 58 mm (6.50" × 2.44" ×2.28") |
| Weight | Approx. 150 g (0.33 lb.) |
| Operating Condition | -40 °C to 60 °C (-40 °F to 140 °F), humidity: 90% or less (non-condensation) |
| Communication | HIKVISION-C |
| Language | English |
| Power Supply | 12 VDC ±25% |
| Consumption | Max. 4.3 W |
| IR Range | Up to 20 m |
| Approval | |
| Protection | IP66 |

▪ **Available Model**

HWT-B150-P

▪ **Dimension**

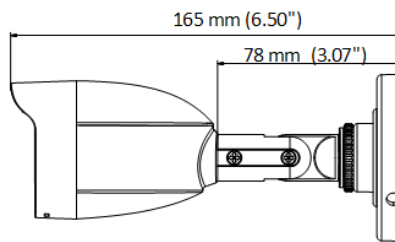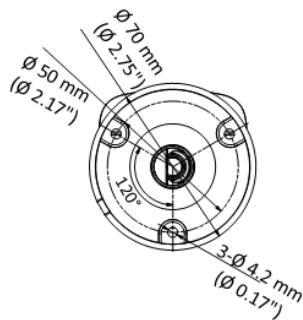

▪ **Accessory**

▪ **Optional**



Distributed by

Мегара Секюрити
<https://shop.sotbg.eu>
shop@sotbg.eu
+359889769686

Headquarters

No.555 Qianmo Road, Binjiang District,
 Hangzhou 310051, China
 T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision USA
 T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Europe
 T +31-23-55-42-770
info.eu@hikvision.com

Hikvision Middle East
 T +971-4-8816086
salesme@hikvision.com

Hikvision Russia
 T +7-495-669-67-99
saleru@hikvision.com

Hikvision India
 T +91-22-28469900
sales@pramahikvision.com

Hikvision Italy
 T +39-0438-6902
info.it@hikvision.com

Hikvision France
 T +33(0)1-85-330-450
info.fr@hikvision.com

Hikvision Spain
 T +34-91-737-16-55
info.es@hikvision.com

Hikvision Poland
 T +48-22-460-01-50
poland@hikvision.com

Hikvision UK
 T +01628-902140
support.uk@hikvision.com

Hikvision Singapore
 T +65-6684-4718
sg@hikvision.com

Hikvision Oceania
 T +61-2-8599-4233
salesau@hikvision.com

Hikvision Canada
 T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Korea
 T +82-31-731-8841
sales.korea@hikvision.com

Hikvision Brazil
 T +55 11 3318-0050
Latam.support@hikvision.com

Hikvision Africa
 T +27 (0) 0351172
sale.africa@hikvision.com

Hikvision Hong Kong
 T +852-2151-1761